


## 陶瓷谐振器 ( CERAMIC RESONATOR )

Dimension	Part No.	Frequency Range (MHz)	Tolerance (+25°C)	Stability (-20 to +80°C)	Aging (10 years)
7.4x3.4x1.8	ZTACCxxMG	2.00 - 8.00	±0.5%	±0.3%	±0.3%
	ZTTCCxxMG				
4.5x2.0x1.2	ZTACRxxMG	4.00 - 8.00	±0.5%	±0.3%	±0.3%
	ZTTCRxxMG				
4.7x4.1x1.6	ZTACSxxMT	6.00 - 13.00	±0.5%	±0.4%	±0.3%
	ZTTCSxxMT				
	ZTACSxxMX	13.01 - 60.00	±0.5%	±0.3%	±0.3%
	ZTTCSxxMX				
3.7x3.1x1.2	ZTACVxxMT	8.00 - 13.00	±0.5%	±0.4%	±0.3%
	ZTTCVxxMT				
	ZTACVxxMX	16.00 - 60.00	±0.5%	±0.3%	±0.3%
	ZTTCVxxMX				
2.5x2.0x1.5	ZTACWxxMX	20.00 - 60.00	±0.5%	±0.3%	±0.3%
	ZTTCWxxMX				

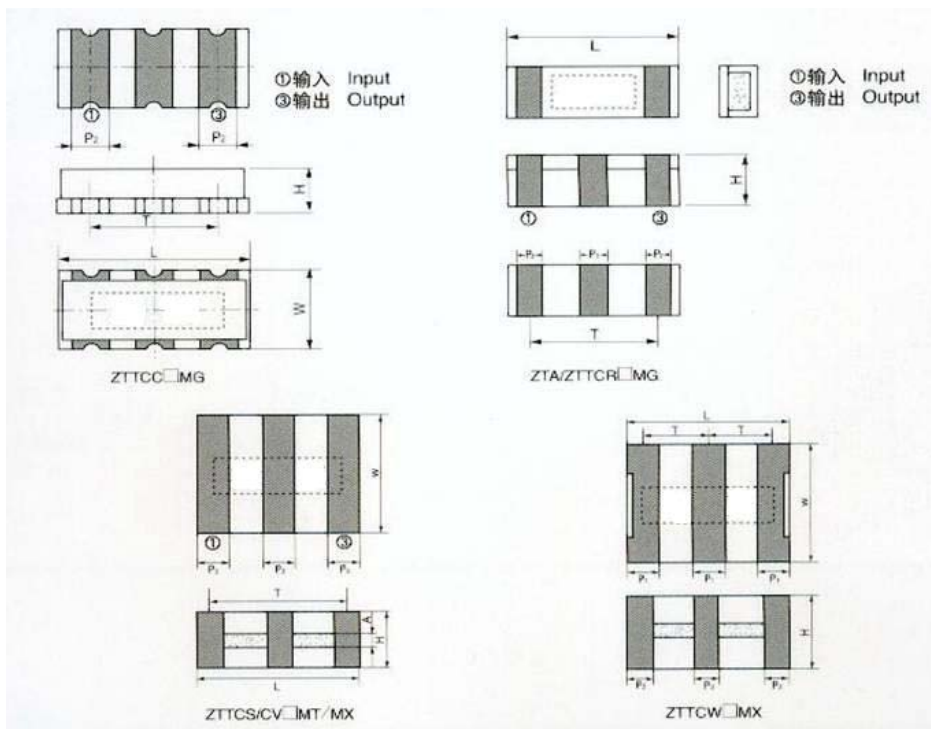

Type	Dimension (mm)					
	L	W	H	P1	P2	T
CC	7.4 ± 0.2	3.4 ± 0.2	1.8 ± 0.2	1.2 ± 0.2	1.2 ± 0.2	5.0 ± 0.2
CR	4.5 ± 0.2	2.0 ± 0.2	1.2 max.	0.8 ± 0.2	0.8 ± 0.2	3.0 ± 0.2
CS	4.7 ± 0.2	4.1 ± 0.2	1.2 ± 0.2	1.0 ± 0.2	0.8 ± 0.2	3.9 ± 0.2
CV	3.7 ± 0.2	3.1 ± 0.2	1.0 ± 0.2	0.9 ± 0.2	0.7 ± 0.2	3.0 ± 0.2
CW	2.5 ± 0.2	2.0 ± 0.2	1.5 max.	0.5 ± 0.2	0.4 ± 0.2	2.0 ± 0.2